

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference	(Form PCT/ISA/2)	f Transmittal of International Search Report 20) as well as, where applicable, item 5 below.
PHN 17.384WO	ACTION	
International application No.	International filing date (day/month/year)	(Earliest) Priority Date (day/month/year)
PCT/EP 00/02274	14/03/2000	15/03/1999
Applicant		
KONINKLIJKE PHILIPS ELECT	RONICS N.V.	
This International Search Report has bee according to Article 18. A copy is being tra	n prepared by this International Searching Auth ansmitted to the International Bureau.	ority and is transmitted to the applicant
This International Search Report consists  X It is also accompanied by	of a total of sheets. a copy of each prior art document cited in this	report.
Basis of the report		
	international search was carried out on the bas less otherwise indicated under this item.	sis of the international application in the
the international search w Authority (Rule 23.1(b)).	as carried out on the basis of a translation of the	ne international application furnished to this
was carried out on the basis of th  contained in the internation		ternational application, the international search
	this Authority in written form.	
	this Authority in computer readble form.	•
	osequently furnished written sequence listing dos filed has been furnished.	oes not go beyond the disclosure in the
the statement that the infe furnished	ormation recorded in computer readable form is	sidentical to the written sequence listing has been
2. Certain claims were fou	nd unsearchable (See Box I).	
3. Unity of invention is lac	king (see Box II).	
4. With regard to the <b>title</b> ,		
the text is approved as su	bmitted by the applicant.	
the text has been establis	shed by this Authority to read as follows:	
·		
5. With regard to the abstract,		
the text is approved as su	ubmitted by the applicant.	· · · · · · · · · · · · · · · · · · ·
the text has been establis	shed, according to Rule 38.2(b), by this Authorite date of mailing of this international search rep	
6. The figure of the <b>drawings</b> to be pub	lished with the abstract is Figure No.	5
as suggested by the appl	icant.	None of the figures.
because the applicant fai		
because this figure better	characterizes the invention.	

tional Application No PCT/EP 00/02274

A. CLASSII IPC 7	FICATION OF SUBJECT MATTER G11C16/22 G06F1/00		
According to	International Patent Classification (IPC) or to both national classific	ation and IPC	
	SEARCHED		
Minimum do IPC 7	cumentation searched (classification system followed by classificati ${\sf G11C}$ ${\sf G06F}$ ${\sf H04L}$ ${\sf G11B}$	on symbols)	
Documentat	ion searched other than minimum documentation to the extent that s	such documents are included in the fields se	earched
Electronic da	ata base consulted during the international search (name of data ba	se and, where practical, search terms used	
C. DOCUME	NTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the rel	evant passages	Relevant to claim No.
A	US 4 757 534 A (MATYAS STEPHEN M 12 July 1988 (1988-07-12) column 12, line 45 -column 13, li	·	1-7
A	FR 2 760 871 A (BULL CP8) 18 September 1998 (1998-09-18) page 9, line 7-32; figure 4		1-7
A	EP 0 575 765 A (HUGHES AIRCRAFT 0 29 December 1993 (1993-12-29) column 4, line 9-57; figure	00)	1-7
			,
Furth	ner documents are listed in the continuation of box C.	χ Patent family members are listed	in annex.
	tegories of cited documents :	"T" later document published after the inte or priority date and not in conflict with	the application but
consid	ered to be of particular relevance locument but published on or after the international	cited to understand the principle or the invention  "X" document of particular relevance; the cannot be considered novel or cannot.	laimed invention
"L" docume which i citation	nt which may throw doubts on priority claim(s) or is cited to establish the publication date of another n or other special reason (as specified)	involve an inventive step when the do "Y" document of particular relevance; the c cannot be considered to involve an in-	cument is taken alone laimed invention ventive step when the
other n	ant referring to an oral disclosure, use, exhibition or neans ant published prior to the international filing date but an the priority date claimed	document is combined with one or moments, such combination being obvior in the art.  *&* document member of the same patent	us to a person skilled
	actual completion of the international search	Date of mailing of the international sea	<del></del>
2	8 July 2000	08/08/2000	
Name and n	nailing address of the ISA  European Patent Office, P.B. 5818 Patentlaan 2  NL – 2280 HV Rijswijk  Tel. (+31–70) 340–2040, Tx. 31 651 epo nl,  Eax: (+31–70) 340–3016	Authorized officer Lindquist, J	

1

tion on patent family members

ational Application No PCT/EP 00/02274

	t document search report		Publication date	F	Patent family member(s)	Publication date
US 47	757534	A	12-07-1988	CA DE DE EP JP JP JP	1238427 A 3587072 A 3587072 T 0191162 A 1630801 C 2060007 B 61145642 A	21-06-1988 18-03-1993 12-08-1993 20-08-1986 26-12-1991 14-12-1990 03-07-1986
FR 27	760871	A	18-09-1998	AU EP WO JP NO	6922898 A 0914640 A 9840853 A 11510678 T 985275 A	29-09-1998 12-05-1999 17-09-1998 14-09-1999 01-12-1998
EP 05	575765	A	29-12-1993	US DE DE JP	5265159 A 69326858 D 69326858 T 6095949 A	23-11-1993 02-12-1999 31-05-2000 08-04-1994

#### **PCT**

### WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



#### INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7:
G11C 16/22, G06F 1/00

A1

(11) International Publication Number: WO 00/55861

(43) International Publication Date: 21 September 2000 (21.09.00)

EP'

EP

(21) International Application Number: PCT/EP00/02274

(22) International Filing Date: 14 March 2000 (14.03.00)

(30) Priority Data:

99200776.5 15 March 1999 (15.03.99) 99200930.8 26 March 1999 (26.03.99)

(71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

- (75) Inventors/Applicants (for US only): STARING, Antonius, A., M. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). IJDENS, Pieter, B. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). JOCHEMSEN, Robert [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). TOL, Ronald, M. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (74) Agent: FAESSEN, Louis, M., H.; Internationaal Octrooibureau B.V., Prof Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States: CA, JP, KR, MX, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

#### **Published**

With international search report.


Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

## RECEIVED

JUL 3 1 2003

Technology Center 2100

(54) Title: A METHOD AND SYSTEM FOR PROVIDING COPY–PROTECTION ON A STORAGE MEDIUM AND STORAGE MEDIUM FOR USE IN SUCH A SYSTEM

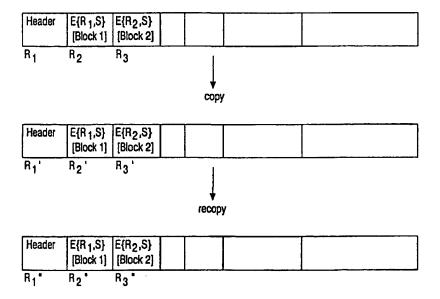

#### (57) Abstract

In a method for providing copy-protection services on a storage medium (for instance a solid state memory module), the data are arranged in sectors to which a field (S4T) is associated, where said field contains a random value  $R_i$  which is changed randomly when writing data to said sector. By encrypting the data stored on the medium using a key which depends critically on said random numbers, bit-by-bit copies (apart from said random numbers, which can not be deterministically changed by an application) to a second storage medium or recopies from some intermediate storage medium, can not be decrypted because the values of said random numbers will have changed, thus preventing unauthorized duplication and replay attacks.

#### FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AΤ	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
ΑZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	ТJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Ītaly	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

PCT/EP00/02274

A method and system for providing copy-protection on a storage medium and storage medium for use in such a system.

WO 00/55861

5

10

15

20

25

The invention relates to a method for providing copy-protection to a data storage medium, in particular to solid state memory modules. The method is in particular useful for, but not restricted to, devices in which a removable random access memory module can be inserted such as for instance portable play back devices. With advancing technology, next generations of portable audio playback and recording devices will be based on solid state technology. Arguments in favor are based on weight, power and shockproofness considerations.

Software providers, e.g. music publishers, require measures against unauthorized copying of the digitally stored information, with little or preferably no inconvenience to an authorized user. In addition, the method and system should support such business models as rental, try-before-you-buy, and controlled copying (e.g. super distribution). A particular problem is posed by devices that can potentially access all information on the storage media, without complying with protection standards.

It should be prevented to make perfect bit copies of the storage medium such that the duplicates both play simultaneously in different players.

A solution to this requirement is to encrypt the data (for instance audio) using a property of the storage media (for instance removable solid state memory modules) which is unique for each storage medium and which cannot be changed. For example, one could encrypt audio data using a key which is derived at least in part from a "module ID" which cannot be modified by a user, where the module ID is a fixed number (e.g. a serial number).

Alternatively, a "fingerprint" of each storage medium may be obtained from the location of bad (defect) blocks on the medium, which subsequently can be used as the module ID. Since the key is specific to the storage medium, a copy of the content on other storage medium can not be decrypted.

However, this approach does not protect against replay attacks, which can be seen as follows. Once the content, e.g. audio, is stored on the storage medium, it can be read off the storage medium using a non-compliant device, and stored in an archive. The audio content can not be played from the archive because it is stored in encrypted form. However, as soon as the content on the storage medium has been expired or otherwise become

unusable, it can be replaced by a fresh copy from the archive. It is clear that this can be repeated indefinitely, and as such methods for copy-protection based on unique ID's as described above are not suitable to implement new business models such as rental etc.

5

10

15

20

25

30

One solution to overcome this problem is to equip the storage medium with a smart card IC, which controls access to the memory using some authentication protocol (e.g. based on public key cryptography). This would prevent a non-compliant device to copy the module content to an archive, and subsequently to restore it after the original on the module has been expired. However, this may be to costly a solution. In addition, due to the limited processing power of such an IC, an authentication protocol based on public key cryptography may result in an unacceptable delay before the audio starts playing.

It is therefore an object of the invention to provide an improved copy protection method and system, in particular against replay attacks, in a simple manner.

Now, therefore according to one of its aspects the invention is characterized according to the characterizing part of Claim 1, i.e. that the stored data is arranged in sectors, a tagging part being associated with each sector, where the tagging part comprises a field (S4T) that stores a value which is randomly altered with each write access to said sector, said field being read only for external access, and the stored data being encrypted with an encryption key that is at least in part derived from at least some of said fields (S4T).

The method and the storage medium architecture in accordance with the invention provide a flexible scheme for providing copy protection. The core of the invention is that each sector on the storage medium has an associated field (named below the "Secure Solid Sate Sector Tag" or S4T) which stores a random number. This random number is renewed on each write operation to that sector by some preferably dedicated (and in case of solid state memory modules preferably on-chip) logic, and can not be modified deterministically by devices employing the module. This can be used to prevent replay attacks by encrypting the content stored on the medium using a key which is at least in part derived from the random numbers associated with the sectors in which it is stored.

The invention also relates to a system arranged for implementing a method as claimed in claim 1, a player for playing a recording prepared according to a method as claimed in claim 1, and a record carrier prepared according to a method as claimed in claim 1. Further advantageous aspects of the invention are recited in dependent Claims.

These and other objects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

In the drawings:

Figure 1 shows a conceptual two-player arrangement

Figure 2 illustrates the mechanism of 'replay attacks' in the prior art.

Figure 3 shows a schematic logic architecture of a memory module

Figures 4a-4c various examples of a memory module

Figure 5 a usage example of an S4T value

Figures 6A and 6B illustrate a further embodiment of the invention.

Figures 7-11 illustrate further embodiments of the method and system in more

detail.

5

10

15

20

25

30

The invention is exemplified below by reference to audio and removable random access (solid state) memory modules, but the invention is not limited to audio nor to removable random access memory models, it is applicable to any kind of data stored on a data storage unit, such as for instance audio, video, text or any combination thereof. It is also applicable to storage media and data storage units in general, such as for instance to hard disks.

In relation to audio players and related devices it is noted that it is preferred that the method protects the interests of the content providers, be it the major record labels or small garage bands, yet addresses consumer interests such as convenience, sound quality, and privacy.

Figure 1 illustrates a conceptual two-player arrangement, with two players A and B, and a module C that may be transposed between the players. As shown, both players have appropriate means for inserting the module.

Basically, two approaches exist for copy protection. The first is to bind the audio to a specific player by providing each individual player with a unique, secret, number that is used as the key for encryption of the audio. Therefore, the audio stored on memory modules by one player will play on that player only. Of course, this is very annoying if one has multiple players (for instance SSA players). It is required that one is able to play music stored on a memory module, regardless of the device used to download it onto the module.

What should be prevented is that a user can copy the audio content to another module and be able to play from both.

One known solution is to embed a unique identification code (ID) in the memory module, which can be read by the application, but which can not be changed. This identification code can then be used to generate an encryption key, which is specific for the module.

5

10

15

20

25

30

Another known solution is to make use of defects in the memory modules, which naturally occur as a result of the manufacturing processes used to fabricate cheap but high storage capacity memories. The locations of these natural defects probably will be unique for each module, and as such can act as a 'fingerprint' of that device. Again, a unique key can be generated, which is specific for the module.

These known solutions do not provide protection against replay attack as will be explained in figure 2 below. A 'replay attack' is a form of copying in which a copy is made from one system (system 1) to another (system 2), where the unauthorized (but unplayable copy) on system 2 can be used to restore a playable copy on system 1 over and over again, even after expiration of the original copy. Figure 2 illustrates this in more detail. Each system comprises a unique identification number, represented by ID1 for system 1 and ID2 for system 2. In this example the data in respect of rights and usage on the original copy are encrypted with a key that is derived from ID1 and a secret S. In a 'try-before-you-buy' or a rental business model, further access to the data is denied after a certain period of time, or after a number of uses. In the known system, data on the original system are encrypted with a key that is derived from ID1. So copying the data to a system having a unique identification code ID2 (second step in figure 2) will not render a usable copy, since the identification code does not match the code ID1. However, this copy is exactly (bit-by-bit) the same as the original. It can at any time be recopied back from system 2 to system 1 and this copy of a copy can be used. This enables a fraudulent customer to retain on system 2 a copy that can be recopied again and again on system 1 and will be usable. 'Try-before-you-buy'thus has become 'try-indefinitely.' Likewise, this scheme can be used to pay once for a rental and have a copy for ever.

The method in accordance with the invention herein is relatively inexpensive. The basic idea to prevent a replay attack requires to design storage media which enter different states, even though the data to be stored are identical. The method is presented using an example of a solid state module but is applicable to other kinds of storage modules that have some simple control logic built in (e.g. hard disc drives etc.). The invention provides a

WO 00/55861 PCT/EP00/02274 5

flexible framework for building a copy protection system, without imposing limitations on the usage of the module.

5

10

15

20

25

30

Current flash memory modules for solid state hard disk and multimedia storage applications are organized in 512 byte sectors. Associated with each sector is a tag area (usually 16 bytes), which is employed to store e.g. a bad block flag, a usage count (to implement wear leveling), and error correction information. This data typically is maintained by an on-board controller or by the application. In the invention the tag area (or part of the tag area) of each sector is extended with a so-called "Secure Solid State Sector Tag," or S4T for short or a second or separate tag area is introduced (below also called a S4T). This S4T field will contain a random number, and has the following two basic properties: the random number is changed on each write access to the sector by some (preferably on-chip) logic; it can not be modified by devices employing the module, i.e. it is read-only for external accesses.

Figure 3 illustrates a schematic logic architecture of a memory module in accordance with the invention. The S4T field may advantageously and preferably be integrated inside the memory chip. As shown, the write data operation to a sector will trigger the random number generation RNG, and input the latter together with the data proper through an input register and a buffer into main storage. In a read operation, the data proper and the value stored in the S4T field will leave through this buffer again. Storage proper has the sector data, the tag area, and the S4T field.

Figure 4a-4c illustrate various examples of memory modules. Figure 4a has the preferred embodiment with all information combined within the memory chip itself. Figure 4b has an external S4T controller. Figure 4c has an external S4T controller, as well as an external S4T storage. An initial realization could be to have a memory chip on the module, alongside with the controller. The latter will generate the random numbers, reserve part of the tag area for storing the random numbers, and block write operations to the reserved part of the tag area other than those for storing the random numbers. For clarity, no interconnections have been detailed.

The S4T field can be exploited within the framework of the invention to construct a copy protection system, which is resistant against replay attacks and thus enables new business models to be implemented, as follows. The content is stored on the memory module in an encrypted form, either using a single key, or using a set of different keys in the case of block wise encryption. The rights which have been purchased with the content, and the usage information can also be stored on the module. These need not necessarily be

encrypted. Finally, the key(s) used to encrypt the content are stored on the module, encrypted with a key that is derived at least in part from the value of the S4T fields of the sectors in which the rights and usage information is stored, a secret (e.g. a key that is shared by all or a group of players), and optionally or alternatively to the value of the S4T fields of the rights and usage sectors the values of some or all of the values in the S4T fields of the sectors in which the content is stored.

5

10

15

20

25

30

Preferably the key is derived from at least the value of a sector in which rights information and/or a sector in which usage information is stored because preventing copying the usage and/or rights information is a very efficient manner of protection. A fraudulent user may attempt not so much to copy all information of a medium, but only the user and/or rights information. For instance when a user is allowed to use a recording 10 times, he/she could make a copy of only the user and/or right information, and after having played the recording 10 times, attempt a 'replay attack' by only recopying the user and/or rights information. If successful the recording may be played yet another 10 times etc.

Figures 5 illustrates a method in accordance with the invention. Each time data are stored in a sector, in its S4T field a randomly chosen number is written. In Figure 5 these random numbers are below the sectors indicated by  $R_1$ ,  $R_2$  etc. The data are encrypted with a key that is dependent on a secret S and the number  $R_i$  or a combination of numbers  $R_i$ .

Making a copy of the data on the memory module will change in a irreproducible manner the numbers  $R_i$  (see Figure 5). In fact such will happen twice. Therefore, a recopy of a copy will have data for which the random numbers  $(R_1)$ ,  $R_2$  etc) do not correspond to the arguments required for a proper decryption of the data. Subsequently, the encryption key can no longer be recovered and the copy of the copy cannot be decrypted and is useless. Any 'replay attack' is prevented.

To expand on this description, an exact bit copy of the audio content can be made to an intermediate storage device (e.g. a PC hard disk) since there are no restrictions whatsoever to reading the memory. However, this copy is unusable because it is encrypted with a key that can not be obtained because the secret is unknown to non-compliant applications. On each play back of the audio content, the usage information is updated and checked against the rights. If the content has not been expired, the updated information is stored in the memory, and the key(s) used to encrypt the content are re-encrypted using the new value S4T fields of the sectors in which the rights and usage information is stored. Now suppose that the audio content has been expired, and the bit copy has been placed back in memory. The result is not an exact bit copy, because the values in the S4T fields have been

changed randomly on each write access to the memory. Therefore, the player will fail to

changed randomly on each write access to the memory. Therefore, the player will fail to recover the key(s) used to encrypt the audio content, since this requires the original values of the S4T fields (which are on the intermediate storage device, but can not be placed back in the memory module). Accordingly, the replay attack fails.

PCT/EP00/02274

5

WO 00/55861

A further potential attack would be to change the rights and usage information, which may have been stored in the clear (i.e. not encrypted). Again, the value of the S4T field of the sectors in which this information is stored will be irrevocably changed, thus rendering recovery of the key(s) used to encrypt the content impossible. Again, the attack fails (even if the rights and usage information is stored in the clear).

10

15

Figure 6A illustrates a usage example of an S4T value in line with the above, with the sector data, the tag area data, and the random numbers  $R_i$ . On each playback of the content, the usage information is updated and checked against the rights. If the content has not been expired, the information is updated and re-stored and the key(s) used for content encryption re-encrypted using the new values of the S4T fields of the sectors in which the rights and usage information are stored. The content is encrypted with a secret key K. The encryption key K itself is stored after encryption with a key K', that is the result of a hash function H taking the S4T values  $R_1$ , ..  $R_{n+2}$  and the secret S as arguments. K may be multiple.

20

If the content is copied and recopied, the player will fail (as in the method illustrated in figure 5) to recover the keys because K' is changed in an intractable manner. This is schematically indicated in figure 6B. Accordingly any replay attack fails. The method does not necessitate the use of a unique identification code.

25

Thus copying is prevented in an inexpensive manner requiring only moderate processing facilities. It is noted that the invention provides the possibility of constructing a copy protection system without the need to use an unique identification code. This does not exclude the use of such a code for other reasons or for extra protection.

30

The embodiment shown in figure 5 in which each sector is encrypted with a key having different arguments, said arguments being formed by a number or a set of number R<sub>i</sub>, has the advantage that each sector has its own separate key. Immediately after the said number has become available decryption can be commenced, thus decryption can be done fast. The embodiment shown in figures 6 and 7 is, having a common key, which is dependent on the total set of random numbers. Decryption can only commence after all random numbers have been generated. This makes this method, compared to the first mentioned relatively slower, but because a larger set of random numbers is used, relatively safer.

5

10

15

20

25

30

It is also possible to arrange the data in groups of sectors, and groups of sectors having associated with it a random number Ri. The same schemes as above may be used for groups of sectors, instead of sectors. 'Random numbers' within the concept of the invention in its broadest sense means numbers which for all due purposes cannot be predicted in advance. 'Numbers' is to be broadly interpreted and may include any set of parameters from which a random choice is made. 'For all due purposes' is stated since to obtain random numbers usually some kind of algorithm is used. Although preferably the method is applied to all or substantially all data on the memory module, the invention encompasses embodiments in which the method is applied to only a part of the data on the memory module. This could for instance be advantageous from the point of view of speed of operation. The invention is not restricted to using one and only one encryption method. If the data are divided in groups, embodiments using different encryption methods and different ways of deriving keys from the random numbers in the S4T fields for said encryption methods may be used for different groups. This reduces the risk of unauthorized decryption. Although the controller may be provided in the system apart from the memory module, preferably the controller unit by which the random numbers (RNG) are chosen is integrated in the memory module. This makes it difficult to circumvent the method or to influence the generation of the random numbers.

The embodiment shown in figure 5 in which each sector is encrypted with a key having different arguments, said arguments being formed by a number or a set of number R<sub>i</sub>, has the advantage that each sector has its own separate key. This makes unauthorized decryption very difficult. The embodiment shown in figures 6 and 7 is, having a common key, relatively simpler which simplifies authorized decryption.

In short the invention may be described as follows:

In a method for providing copy-protection services on a storage medium (for instance a solid state memory module), the data are arranged in sectors to which a field (S4T) is associated, where said field contains a random value R<sub>i</sub> which is changed randomly when writing data to said sector. By encrypting the data stored on the medium using a key which depends critically on said random numbers, bit-by-bit copies (apart from said random numbers, which can not be deterministically changed by an application) to a second storage medium or recopies from some intermediate storage medium, can not be decrypted because the values of said random numbers will have changed, thus preventing unauthorized duplication and replay attacks.

CLAIMS:

5

10

Method for providing copy-protection services on a data storage medium, characterized in that the stored data is arranged in sectors, a tagging part being associated with each sector, where the tagging part of said sector comprises a field (S4T) that stores a value R<sub>i</sub> which is randomly altered with each write access to said sector, said field being read only for external access, and the stored data being encrypted with an encryption key that is at least in part derived from values of at least some of said fields (S4T).

- 2. Method as claimed in claim 1, characterized in that the data storage medium is a removable memory module.
- 3. Method as claimed in claim 1, characterized in that the encryption key is derived from the values of said S4T fields associated with sectors in which rights and/or usage information is stored.
- 4. Method as claimed in claim 3, characterized in that the encryption key is in addition derived from values of said S4T fields associated with sectors in which the content is stored.
- 5. System arranged for implementing a method as claimed in claim 1 comprising a controller unit for choosing the values at random.
  - 6. Player for playing from a data storage unit prepared according to a method as claimed in claim 1.
- 25 7. Data storage medium prepared according to a method as claimed in claim 1 comprising a controller unit for choosing the random values.

1/6


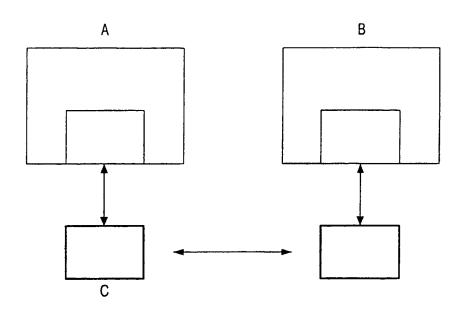



FIG. 1

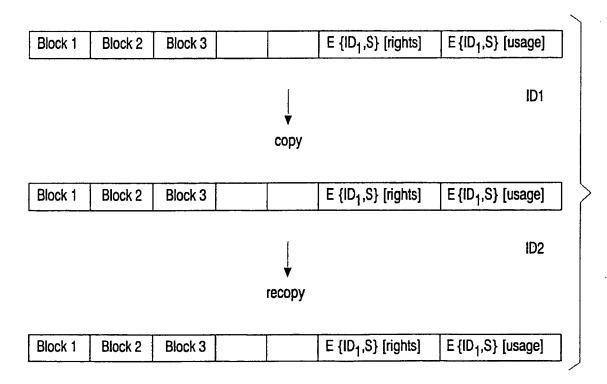


ID1

FIG. 2

2/6

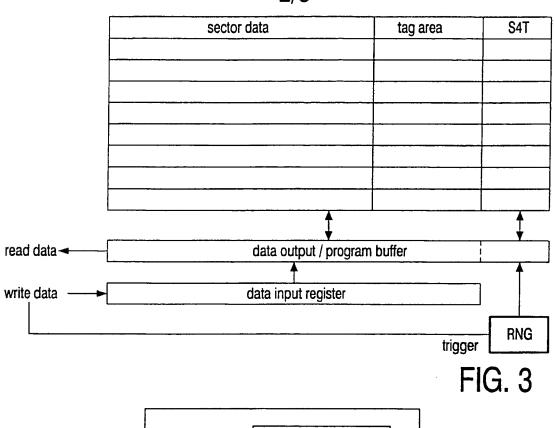

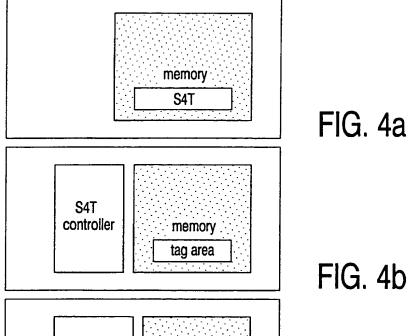

memory

S4T controller

S4T

FIG. 4c

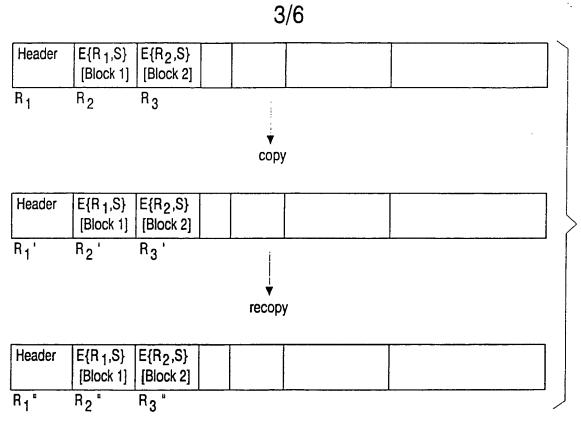


FIG. 5

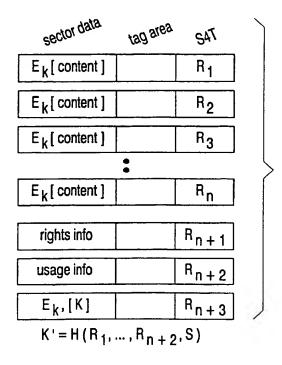


FIG. 6a

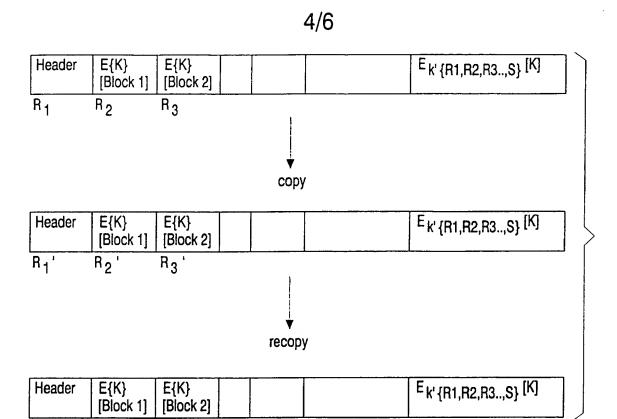


FIG. 6b

R<sub>2</sub>"

R<sub>1</sub>"

R<sub>3</sub> "

Sector data	S4T
IDA, Enc[K Pub, A; S, IDA, x, y]	T <sub>1</sub>
ID <sub>A</sub> , Enc [K <sub>Priv, A</sub> ; H[T <sub>1</sub> , S, ID <sub>A</sub> , x, y]]	T <sub>2</sub>
E[K; audio]	TJ
E [ K; audio ]	TN
rights info	$T_{N+1}$
usage info	T <sub>N+2</sub>
Enc[H[ $T_J,, T_N, T_{N+1}, T_{N+2}, S$ ];K]	

FIG. 7

# 5/6

Sector data	S4T
IDA, Enc[K Pub, A; S, IDA, x, y]	T 1
ID <sub>A</sub> , Enc [K <sub>Priv, A</sub> ; H[T <sub>1</sub> , S, ID <sub>A</sub> , x, y]]	T <sub>2</sub>
ID <sub>B</sub> , Cert (K <sub>Pub, B</sub> )	
E [K; audio]	Τj
E [ K ; audio ]	TN
rights info	T <sub>N+1</sub>
usage info	T <sub>N+2</sub>
Enc [H[ $T_J$ ,, $T_N$ , $T_{N+1}$ , $T_{N+2}$ , S]; K]	

FIG. 8

	,
Sector data	S4T
IDA, Enc[K <sub>Pub, A</sub> ; S, ID <sub>A</sub> , x, y]	Т1
$ID_A$ , Enc [K $Priv$ , A; H [T $_1$ , S, $ID_A$ , x, y]]	T <sub>2</sub>
IDB, Enc [K Pub, B, S, IDA, T1, T2]	Тз
E [ K ; audio ]	Tj
E [ K ; audio ]	TN
rights info	T <sub>N+1</sub>
usage info	T <sub>N+2</sub>
Enc[H[ $T_J,, T_N, T_{N+1}, T_{N+2}, S$ ];K]	

FIG. 9

# 6/6

Sector data	S4T
IDA, Enc[K Pub, A; S, IDA, x, y]	Т1
$ID_A$ , Enc [K $P_{riv, A}$ ; H[T <sub>1</sub> , S, $ID_A$ , x, y]]	T <sub>2</sub>
$ID_B$ , Enc [K $_{Pub, B}$ ; S, $ID_B$ , $_p$ , $_q$ ]	Тз
$ID_B$ , Enc $[K_{Priv, B}; H[T_3, S, ID_B, p, q]]$	T <sub>4</sub>
E [ K ; audio ]	Tj
•••	
E [K; audio]	TN
rights info	T <sub>N+1</sub>
usage info	T <sub>N+2</sub>
Enc[H[ $T_J$ ,, $T_N$ , $T_{N+1}$ , $T_{N+2}$ , S]; K]	

FIG. 10

Sector data	S4T
IDA, Enc[K Pub, A; S, IDA, x, y]	Т1
IDA, Enc[K Priv, LMC; H[T1, S, IDA, x, y]]	T <sub>2</sub>
ID <sub>B</sub> , Enc [K <sub>Pub, B</sub> ; S, ID <sub>B</sub> , p, q]	Тз
$ID_B$ , Enc [ K $_{Priv, LMC}$ ; H [ $T_3$ , S, $ID_B$ , p, q ]]	T <sub>4</sub>
ID <sub>LMC</sub> Cert (K <sub>Pub, LMC</sub> )	• • •
E [ K ; audio ]	Tj
•••	• • •
E [ K ; audio ]	T <sub>N</sub>
rights info	T <sub>N+1</sub>
usage info	T <sub>N+2</sub>
Enc [H[ $T_J,, T_N, T_{N+1}, T_{N+2}, S$ ]; K]	

FIG. 11

II. national Application No

			PCT/EP 00	/02274
A. CLASSI IPC 7	FICATION OF SUBJECT MATTER G11C16/22 G06F1/00			
According to	o International Patent Classification (IPC) or to both national classific	ation and IPC		
	SEARCHED			
Minimum do IPC 7	ocumentation searched (classification system followed by classification G11C G06F H04L G11B	ion symbols)		
	tion searched other than minimum documentation to the extent that state is a search of the extent that state is a search (name of data base consulted during the international search (name of data base)			
		S9 dru. Where practices,	Searon terms used	
C. DOCUME	ENTS CONSIDERED TO BE RELEVANT			
Category <sup>5</sup>	Citation of document, with indication, where appropriate, of the rel	evant passages		Relevant to claim No.
A	US 4 757 534 A (MATYAS STEPHEN M 12 July 1988 (1988-07-12) column 12, line 45 -column 13, li			1–7
A	FR 2 760 871 A (BULL CP8) 18 September 1998 (1998-09-18) page 9, line 7-32; figure 4			1-7
Α	EP 0 575 765 A (HUGHES AIRCRAFT 0 29 December 1993 (1993-12-29) column 4, line 9-57; figure 	(0)		1-7
Furth	ner documents are listed in the continuation of box C.	X Patent family m	nembers are listed	in annex.
"A" docume	nt defining the general state of the art which is not	"T" later document public or priority date and	not in conflict with	the application but
"E" earlier di filing da "L" documer which is citation "O" docume other m "P" documer	are  nt which may throw doubts on priority claim(s) or s cited to establish the publication date of another or other special reason (as specified) int referring to an oral disclosure, use, exhibition or	invention  "X" document of particul, cannot be consider involve an inventive  "Y" document of particul, cannot be consider document is combined.	ar relevance; the cied novel or cannot step when the do ar relevance; the cied to involve an inved with one or monation being obvious	be considered to coument is taken alone laimed invention rentive step when the re other such docuus to a person skilled
Date of the a	actual completion of the international search	Date of mailing of th	e international sea	rch report
28	3 July 2000	08/08/20	100	
Name and m	nailing address of the ISA  European Patent Office. P.B. 5818 Patentlaan 2  NL – 2280 HV Rijswijk  Tel. (+31–70) 340–2040, Tx. 31 651 epo nt, Fax: (+31–70) 340–3016	Authorized officer Lindquis	st, J	

Information on patent family members

II. lational Application No PCT/EP 00/02274

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 4757534	A	12-07-1988	CA	1238427 A	21-06-1988
			DE	3587072 A	18-03-1993
•			DE	3587072 T	12-08-1993
			EP	0191162 A	20-08-1986
			JP	1630801 C	26-12-1991
·			JP	2060007 B	14-12-1990
			JP	61145642 A	03-07-1986
FR 2760871	 А	18-09-1998	AU	6922898 A	29-09-1998
			EP	0914640 A	12-05-1999
			WO	9840853 A	17-09-1998
		•	JP	11510678 T	14-09-1999
			NO	985275 A	01-12-1998
EP 0575765	 А	29-12-1993	US	5265159 A	23-11-1993
			DE	69326858 D	02-12-1999
•			DE	69326858 T	31-05-2000
			JP	6095949 A	08-04-1994